



## LED WET LOCATION

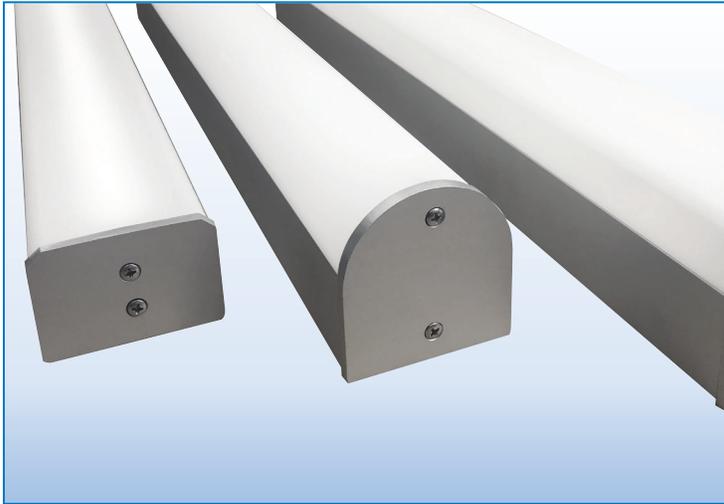

|          |
|----------|
| PROJECT: |
| TYPE:    |

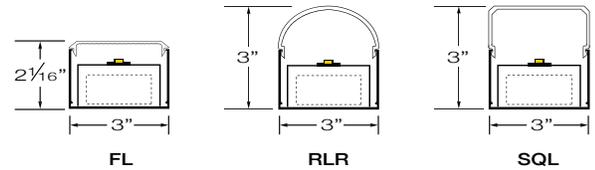

### SPECIFICATIONS

|                      |   |
|----------------------|---|
| <b>HOUSING</b>       | 3" Wide extruded aluminum housing up to 12' long. Continuous runs available.            |
| <b>FINISH</b>        | Satin anodized or white paint finish standard. Custom finish optional.                  |
| <b>LENS</b>          | 3 Options extruded DR acrylic, snap-on frosted widespread lens. See page 2 for details. |
| <b>LED DRIVER</b>    | Integral, universal voltage; 0-10V dimming standard; 1% or 10% dimming.                 |
| <b>MOUNTING</b>      | <b>SURFACE MOUNT:</b> See page 2 for details and options.                               |
| <b>LED's</b>         | (LED boards) 50,000 hours. (L70), 80 CRI, 2700K, 3000K, 3500K and 4000K.                |
| <b>CERTIFICATION</b> | ETL/CSA listed for wet locations.  2001431  MADE IN THE USA                             |

### LED COLOR & LUMEN OPTIONS


| 4' – 24" BOARDS |     | LUMENS PER FOOT – WATTS PER FOOT – LUMENS PER WATT |          |         |          |          |         |           |          |         |
|-----------------|-----|--|----------|---------|----------|----------|---------|-----------|----------|---------|
| LED COLOR       | CRI | LOW  |          |         | MEDIUM   |          |         | HIGH      |          |         |
| WHITE 2700K     | 80  | 500 L/FT   | 3.5 W/FT | 136 L/W | 870 L/FT | 6.5 W/FT | 130 L/W | 1160 L/FT | 9.0 W/FT | 127 L/W |
| WHITE 3000K     | 80  | 530 L/FT   | 3.5 W/FT | 144 L/W | 915 L/FT | 6.5 W/FT | 137 L/W | 1220 L/FT | 9.0 W/FT | 133 L/W |
| WHITE 3500K     | 80  | 535 L/FT   | 3.5 W/FT | 144 L/W | 920 L/FT | 6.5 W/FT | 137 L/W | 1225 L/FT | 9.0 W/FT | 133 L/W |
| WHITE 4000K     | 80  | 560 L/FT   | 3.5 W/FT | 151 L/W | 970 L/FT | 6.5 W/FT | 145 L/W | 1290 L/FT | 9.0 W/FT | 140 L/W |

Higher lumen packages available.


### PART NUMBER

| SERIES      | LUMENS  | COLOR     | VOLTS                       | FEED   | OPTIONS                          | FINISH   | LENGTH |
|-------------|---|-----------|-----------------------------|--|----------------------------------|----------|--------|
| EL3-SQL-LED | L LOW   | 27K 2700K | UNV1<br>(120/277)<br>1% DIM | EF END FEED                                    | MS MOTION<br>SENSOR              | S SATIN  | 2' 8"  |
| EL3-RLR-LED | M MEDIUM  | 3K 3000K  |                             | FD FIELD DRILL                                 | MSP BI-LEVEL<br>MOTION<br>SENSOR | W WHITE  | 3' 9"  |
| EL3-FL-LED  | H HIGH  | 35K 3500K | UNV<br>(120/277)<br>10% DIM | CR CONTINUOUS<br>RUNS                          | JBP J BOX<br>PLATE               | C CUSTOM | 4' 10" |
|             | CP CUSTOM<br>PROGRAMMED<br>(Specify Lumens/FT<br>or Watts/FT) | 4K 4000K  |                             | CONSULT FACTORY<br>FOR CONTINUOUS<br>RUNS FEED |                                  |          | 5' 11" |
|             |   |           |                             |  |                                  |          | 6' 12" |
|             |   |           |                             |  |                                  |          | 7'     |


## LENS OPTIONS

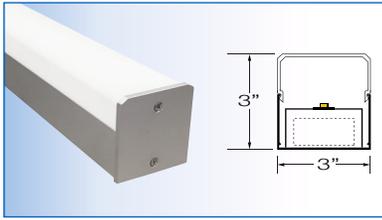

**EL3 – SQL – LED**  
SQUARE LENS

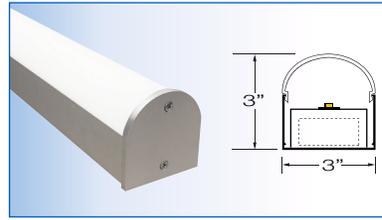

**EL3 – RLR – LED**  
ROUND LENS

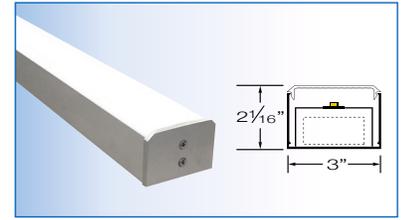


**EL3 – FL – LED**  
FLAT LENS


## FEED OPTIONS



**EF – END FEED**  
1/2" END FEED CONNECTOR  
(INCLUDED)

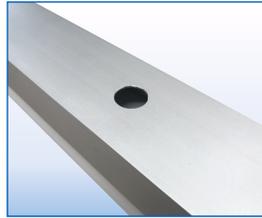


**FD – FIELD DRILL**  
ONLY ON BACK OF HOUSING

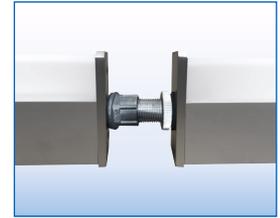

**CR – CONTINUOUS RUNS**  
AVAILABLE. CONSULT  
FACTORY FOR DETAILS

## MOUNTING OPTIONS

- Surface Mount
- Consult factory for pendant mount or any other mounting requirements.
- Mounting holes must be field drilled and siliconed covered.
- Drain holes must be field drilled at lowest point of fixture.
- 2' Fixture requires off center service hole due to 12" driver.
- Narrow housing will not cover recessed J Box. Whip feed recommended. Use optional "JBP" canopy plate for J-Box mount.

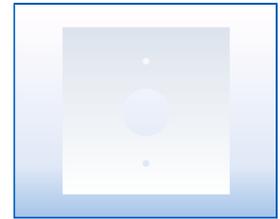

**J-BOX PLATE**  
**JBP** 5" FLAT CANOPY PLATE  
TO COVER J-BOX

## SENSOR OPTIONS




- MOTION SENSOR**
- MS** MOTION SENSOR
  - MSP** PROGRAMMABLE BI-LEVEL  
(MOTION/LIGHT SENSOR  
MOUNTS UNDER LENS  
ADDS 3" TO FIXTURE LENGTH)

## FIXTURE LENGTHS

| NOMINAL LENGTH | 2'  | 3'  | 4'  | 5'  | 6'  | 7'  | 8'  | 9'   | 10'  | 11'  | 12'  |
|----------------|-----|-----|-----|-----|-----|-----|-----|------|------|------|------|
| ACTUAL LENGTH  | 26" | 35" | 50" | 57" | 74" | 90" | 98" | 112" | 122" | 134" | 146" |

PHOTOMETRICS / CANDELA DISTRIBUTION .IES files available online or by calling the factory.

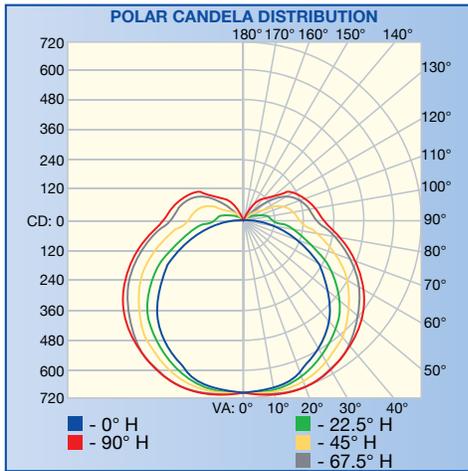


**EL3 – SQL – LED 3" SQUARE LENS**

**POLAR GRAPH**

REPORT NO.: 103499092LAX-001

Based on 4' linear fixture at medium lumens (35K 903L/FT x 4'= 3612L)

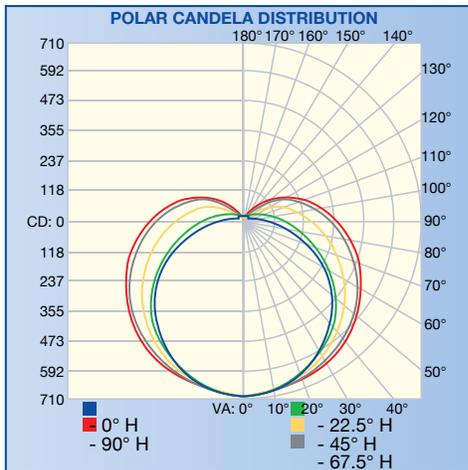


**EL3 – RLR – LED 3" ROUND LENS**

**POLAR GRAPH**

REPORT NO.: 103499092LAX-002

Based on 4' linear fixture at medium lumens (35K 903L/FT x 4'= 3612L)

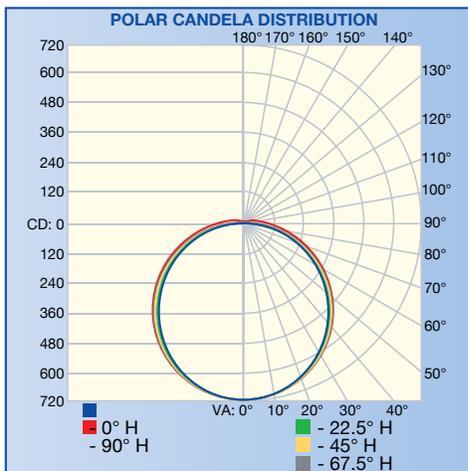

**EL3 – FL – LED 3" FLAT LENS**

**POLAR GRAPH**

REPORT NO.: 103499092LAX-003

Based on 4' linear fixture at medium lumens (35K 903L/FT x 4'= 3612L)