

STEP & AISLE LIGHTING





STEP & AISLE LIGHTING

CONSTRUCTION

Precision extruded rubberized PVC runs that easily conforms to gentle curves. UL approved flame retardant with high grip properties for non slip benefits.

VARIETY OF LEDs

Each board contains 4 LEDs available in eight colors: Amber, Red, Blue and a variety of Whites - Rated 0.25W/Board. The recessed modules are typically spaced in 9", 12" or 18".

EASY REPLACEMENT

The LED boards are replaceable and covered with a prismatic lens that is impact resistant polycarbonate.

TREAD TRIM CONFIGURATION

Numerous trim styles available for both step and aisle applications with edge details to transition from floor to floor, carpet to floor, carpet to wall, carpet to carpet or floor to wall.

COMPLIANCE CERTIFICATIONS

ADA
COMPLIANT



ONLINE PRODUCT PAGE

STEP LIGHTING

Designed to safely illuminate stair edges in theaters, auditoriums, and indoor public spaces.



STEP LIGHTING PERFORMANCE					
LED SPACING	W / MODULE	LEDs / TREAD & RISER		LEDs / TREAD or RISER	
		W / FT	MAX RUNS	W / FT	MAX RUNS
9" O/C	0.25W	0.66W	72' (48W, 4A)	0.33W	144' (48W, 4A)
12" O/C	0.25W	0.50W	96' (48W, 4A)	0.25W	192' (48W, 4A)
18" O/C	0.25W	0.34W	141' (48W, 4A)	0.17W	282' (48W, 4A)

(DERATED 15%)

LED'S AND BOARDS

The LED's boards are replaceable and rated for 12VAC only. Each board contains 4 LEDs available in ten colors: Amber, Red, Blue, and a variety of Whites - Rated 0.25W/Board.



W - WHITE

(W - 2700K)
(W - 3000K)
(W - 3500K)
(W - 4000K)
(W - 5000K)



A - AMBER



R - RED



B - BLUE

LIGHT CONFIGURATIONS



TRL
TREAD AND RISER LIGHT




TL
TREAD LIGHT ONLY




RL
RISER LIGHT ONLY

COMPONENTS

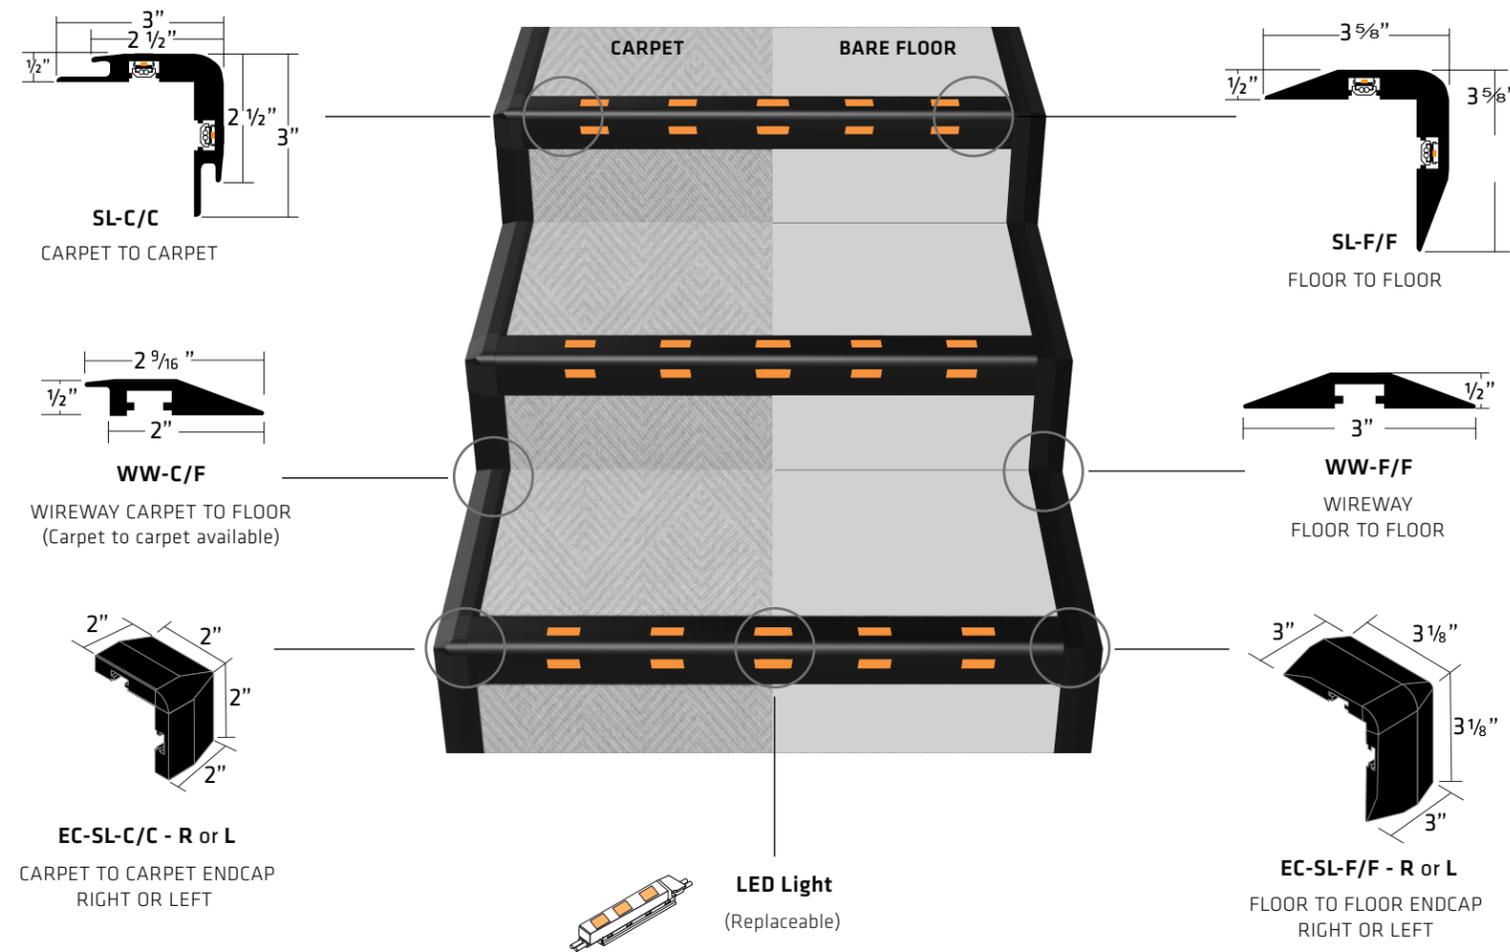

CARPET/CARPET

STEP WITH WIREWAY & ENDCAPS







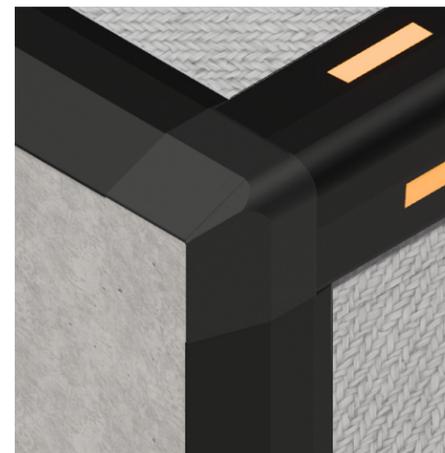


FLOOR/FLOOR

STEP WITH WIREWAY & ENDCAPS




CONFIGURATIONS

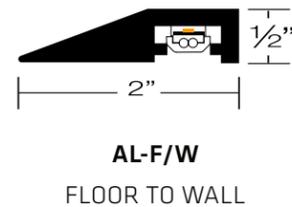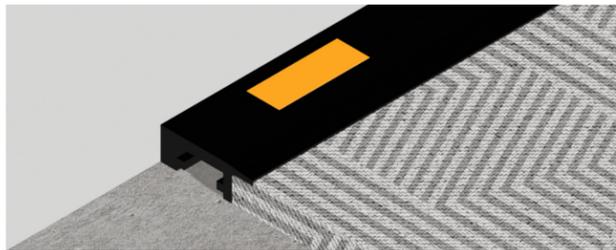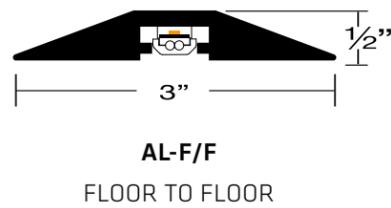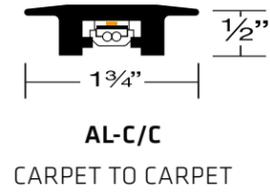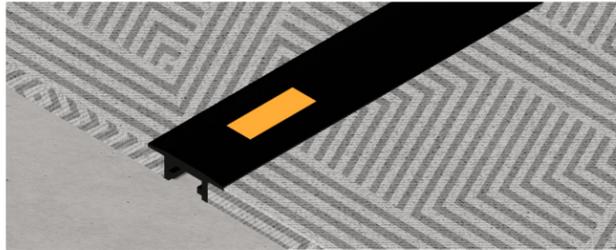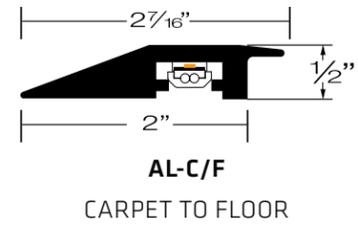

ACCESSORIES



ADH
ADHESIVE

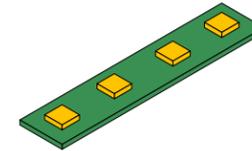

LRB
LED REPLACEABLE BOARD

TRANSFORMERS



120 or 277VAC / 12VAC
class 2 remote transformer Secondary 5A
protection provided Isolated secondary output
Outdoor listed NEMA 3R enclosure Dimmable
with MLV dimmers only. ETL listed. Meets
UL157 1- 1838 and N.E.C. Article 411

AISLE LIGHTING

Designed to safely illuminate plain aisles in theaters, auditoriums, and indoor public spaces.



AISLE LIGHTING PERFORMANCE

LED SPACING	W / MODULE	W / FT	MAX RUNS
9" O/C	0.25W	0.33W	144' (48W, 4A)
12" O/C	0.25W	0.25W	192' (48W, 4A)
18" O/C	0.25W	0.17W	282' (48W, 4A)

(DERATED 15%)

LED'S AND BOARDS

The LED's boards are replaceable and rated for 12VAC only. Each board contains 4 LEDs available in ten colors: Amber, Red, Blue, and a variety of Whites - Rated 0.25W/Board.



W - WHITE
(W - 2700K)
(W - 3000K)
(W - 3500K)
(W - 4000K)
(W - 5000K)




A - AMBER



R - RED



B - BLUE

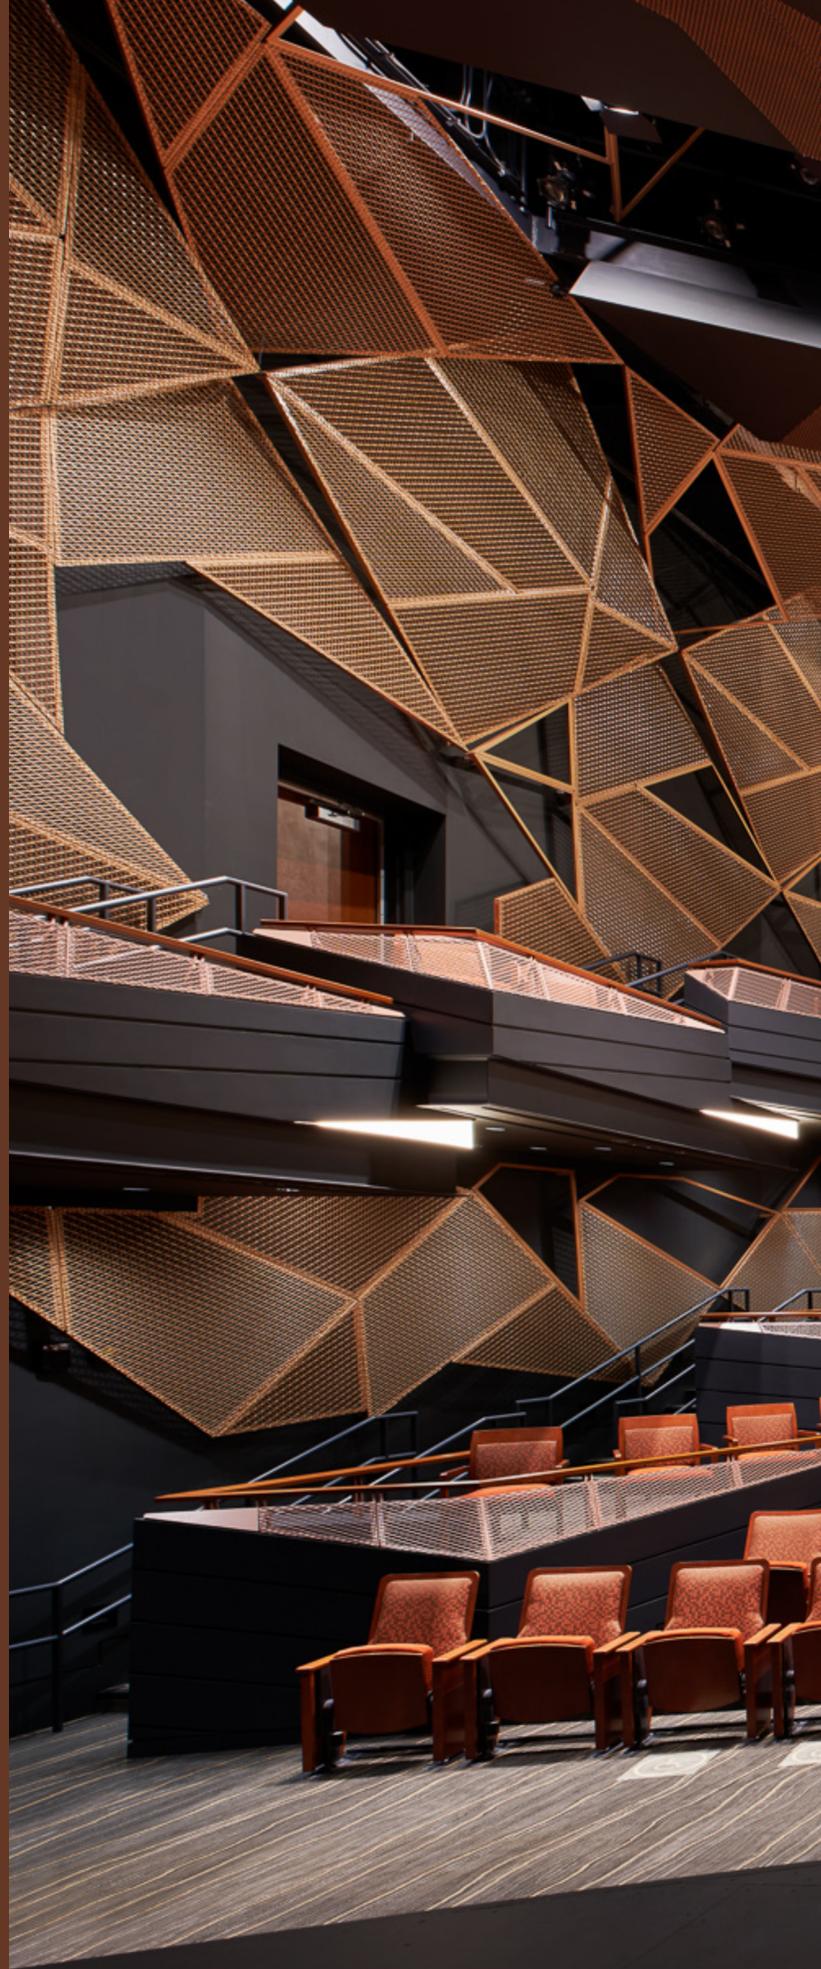

WWW.PRIMUSLIGHTING.COM

© PRIMUS LIGHTING ALL RIGHTS RESERVED